

01/29/99  
Jc631 U.S. PTO

A

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re Patent Application of: Joseph P. Fernando et al.

Title: EXTENSIBLE OBJECT MODEL

Attorney Docket No.: 777.229US1

Jc530 U.S. PTO  
09/24/06  
01/29/99

**PATENT APPLICATION TRANSMITTAL**

**BOX PATENT APPLICATION**

Assistant Commissioner for Patents

Washington, D.C. 20231

We are transmitting herewith the following attached items and information (as indicated with an "X"):

- X Utility Patent Application under 37 CFR § 1.53(b) comprising:
- X Specification ( 30 pgs, including claims numbered 1 through 28 and a 1 page Abstract).
  - X Formal Drawing(s) ( 6 sheets).
  - X Unsigned Combined Declaration and Power of Attorney ( 3 pgs).
  - X Return postcard.

The filing fee (NOT ENCLOSED) will be calculated as follows:


	No. Filed	No. Extra	Rate	Fee
TOTAL CLAIMS	28 - 20 =	8	x 18 =	\$144.00
INDEPENDENT CLAIMS	7 - 3 =	4	x 78 =	\$312.00
[ ] MULTIPLE DEPENDENT CLAIMS PRESENTED				\$0.00
BASIC FEE				\$760.00
TOTAL				\$1,216.00

**THE FILING FEE WILL BE PAID UPON RECEIPT OF THE NOTICE TO FILE MISSING PARTS.**

**SCHWEGMAN, LUNDBERG, WOESSNER & KLUTH, P.A.**

P.O. Box 2938, Minneapolis, MN 55402 (612-373-6900)

**Customer Number 21186**

By:   
Atty: Sheryl Sue Holloway  
Reg. No. 37,850

"Express Mail" mailing label number: EL042945823US.

Date of Deposit: January 29, 1999

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231.

By: Sheryl S. Holloway

Signature: 

## **EXTENSIBLE OBJECT MODEL**

### **FIELD OF THE INVENTION**

5

This invention relates generally to object-oriented run-time environments, and more particularly to providing extension to methods inherent in such environments.

### **COPYRIGHT**

10

A portion of the disclosure of this patent document contains material which is subject to copyright protection. The copyright owner has no objection to the facsimile reproduction by anyone of the patent document or the patent disclosure as it appears in the Patent and Trademark Office patent file or records, but otherwise reserves all copyright rights whatsoever. The following notice applies to the software and data as described below and in the drawings hereto: Copyright © 1997, Microsoft Corporation, All Rights Reserved.

15

### **BACKGROUND OF THE INVENTION**

20

Object-oriented programming (OOP) languages are rapidly replacing the procedure-oriented programming languages that were prevalent in the early 1970's. An object is an encapsulated module of code and related data that is externally accessible only through well-defined and controlled connection points, known as the object's methods and properties. The values of an object's data defines the object's "state." Another object can determine the first object's state and optionally modify that state by specifying the first object's methods and properties in a message directed to the first object. A collection of objects is created to perform the functions a programmer wants to include in a computer application. The OOP

25

paradigm commonly supports the collection as a hierarchy of interconnected objects in a parent-child tree model.

Various application development environments expose object models whose objects are static in nature. Such objects support a fixed (“inherent”) set of properties/methods and are not extensible by external packages. Existing extension mechanisms require that extensions be provided via fixed property/methods or through collection objects. A logical and a hierarchical extension of the object model requires code, interfaces, typelibraries and computer executables to be changed.

Therefore, there is a need in the art for an extension mechanism that can be bound to a particular object in an application object model to provide functions beyond those that are standard in an application development environment, such as additional methods and/or properties for the objects that form the application. Furthermore, there is a need for an extension mechanism that allows the code for the extension to be dynamically added when the extended function is referenced.

## **SUMMARY OF THE INVENTION**

The above-mentioned shortcomings, disadvantages and problems are addressed by the present invention, which will be understood by reading and studying the following specification.

An extensible object model enables extending the inherent methods and/or properties of an object residing at any level in an application object model hierarchy through an extension object. An extension provider object is proffered by an extension package when the extension is first referenced. The extension provider object creates an appropriate extension

object that implements the computer-readable instructions and data necessary for the extension. All references to the extension are serviced by the extension object. Information about the extension package is registered in an extension database when the package is installed, and the database is used to resolve references to the extended methods and/or properties upon execution of the application. A hierarchical parent-child relationship is maintained between the object extended and the extension object that provides the extension.

In one aspect of the extensible object model, the extension provider object and the extension object are cached when first referenced and subsequent references to the extension are resolved to the cache. In addition, particular interfaces that enable the extensibility of objects in various object-oriented application development environments are described.

Because the extension object is not limited to being bound to the root object of the hierarchy, the extensible object model permits an extension to be provided to a single, particular object in the model at any level. Furthermore, because the run-time environment resolves the first reference to an extension to the appropriate extension package, extensions can be activated at application run time rather than at application compile time.

The present invention describes computerized systems, methods, and computer-readable media of varying scope. In addition to the aspects and advantages of the present invention described in this summary, further aspects and advantages of the invention will become apparent by reference to the drawings and by reading the detailed description that follows.

## **BRIEF DESCRIPTION OF THE DRAWINGS**

FIG. 1 is a diagram of the hardware and operating environment in conjunction with which embodiments of the invention may be practiced;

FIG. 2 is a diagram illustrating a system-level overview of an exemplary embodiment of an extensible object model of the invention;

FIG. 3A is a flowchart of a method to be performed by a computer to install an extension package according to an exemplary embodiment of the invention;

FIG. 3B is a flowchart of a method to be performed by a computer to resolve a reference to an extension at run-time;

FIG. 4 is a diagram illustrating an exemplary implementation of the extensible object model; and

FIG. 5 is a diagram of an entry in an extensible data structure for use in an exemplary implementation of the extensible object model.

## **DETAILED DESCRIPTION OF THE INVENTION**

In the following detailed description of exemplary embodiments of the invention, reference is made to the accompanying drawings which form a part hereof, and in which is shown by way of illustration specific exemplary embodiments in which the invention may be practiced. These embodiments are described in sufficient detail to enable those skilled in the art to practice the invention, and it is to be understood that other embodiments may be utilized and that logical, mechanical, electrical and other changes may be made without departing from the spirit or scope of the present invention. The following detailed description is,

therefore, not to be taken in a limiting sense, and the scope of the present invention is defined only by the appended claims.

The detailed description is divided into five sections. In the first section, the hardware and the operating environment in conjunction with which embodiments of the invention may be practiced are described. In the second section, a system level overview of the invention is presented. In the third section, methods for an exemplary embodiment of the invention are provided. In the fourth section, particular implementations of the invention for object-oriented application development environments are described, including a Visual Studio development environment from Microsoft Corporation. Finally, in the fifth section, a conclusion of the detailed description is provided.

#### Hardware and Operating Environment

FIG. 1 is a diagram of the hardware and operating environment in conjunction with which embodiments of the invention may be practiced. The description of FIG. 1 is intended to provide a brief, general description of suitable computer hardware and a suitable computing environment in conjunction with which the invention may be implemented. Although not required, the invention is described in the general context of computer-executable instructions, such as program modules, being executed by a computer, such as a personal computer. Generally, program modules include routines, programs, objects, components, data structures, etc., that perform particular tasks or implement particular abstract data types.

Moreover, those skilled in the art will appreciate that the invention may be practiced with other computer system configurations, including hand-held devices, multiprocessor systems, microprocessor-based or programmable consumer electronics, network PCs,

minicomputers, mainframe computers, and the like. The invention may also be practiced in distributed computing environments where tasks are performed by remote processing devices that are linked through a communications network. In a distributed computing environment, program modules may be located in both local and remote memory storage devices.

5           The exemplary hardware and operating environment of FIG. 1 for implementing the invention includes a general purpose computing device in the form of a computer 20, including a processing unit 21, a system memory 22, and a system bus 23 that operatively couples various system components, including the system memory 22, to the processing unit 21. There may be only one or there may be more than one processing unit 21, such that the  
10       processor of computer 20 comprises a single central-processing unit (CPU), or a plurality of processing units, commonly referred to as a parallel processing environment. The computer 20 may be a conventional computer, a distributed computer, or any other type of computer; the invention is not so limited.

          The system bus 23 may be any of several types of bus structures including a memory  
15       bus or memory controller, a peripheral bus, and a local bus using any of a variety of bus architectures. The system memory may also be referred to as simply the memory, and includes read only memory (ROM) 24 and random access memory (RAM) 25. A basic input/output system (BIOS) 26, containing the basic routines that help to transfer information between elements within the computer 20, such as during start-up, is stored in ROM 24. The  
20       computer 20 further includes a hard disk drive 27 for reading from and writing to a hard disk, not shown, a magnetic disk drive 28 for reading from or writing to a removable magnetic disk 29, and an optical disk drive 30 for reading from or writing to a removable optical disk 31 such as a CD ROM or other optical media.

The hard disk drive 27, magnetic disk drive 28, and optical disk drive 30 are connected to the system bus 23 by a hard disk drive interface 32, a magnetic disk drive interface 33, and an optical disk drive interface 34, respectively. The drives and their associated computer-readable media provide nonvolatile storage of computer-readable instructions, data structures, program modules and other data for the computer 20. It should be appreciated by those skilled in the art that any type of computer-readable media which can store data that is accessible by a computer, such as magnetic cassettes, flash memory cards, digital video disks, Bernoulli cartridges, random access memories (RAMs), read only memories (ROMs), and the like, may be used in the exemplary operating environment.

A number of program modules may be stored on the hard disk, magnetic disk 29, optical disk 31, ROM 24, or RAM 25, including an operating system 35, one or more application programs 36, other program modules 37, and program data 38. A user may enter commands and information into the personal computer 20 through input devices such as a keyboard 40 and pointing device 42. Other input devices (not shown) may include a microphone, joystick, game pad, satellite dish, scanner, or the like. These and other input devices are often connected to the processing unit 21 through a serial port interface 46 that is coupled to the system bus, but may be connected by other interfaces, such as a parallel port, game port, or a universal serial bus (USB). A monitor 47 or other type of display device is also connected to the system bus 23 via an interface, such as a video adapter 48. In addition to the monitor, computers typically include other peripheral output devices (not shown), such as speakers and printers.

The computer 20 may operate in a networked environment using logical connections to one or more remote computers, such as remote computer 49. These logical connections are



achieved by a communication device coupled to or a part of the computer 20; the invention is not limited to a particular type of communications device. The remote computer 49 may be another computer, a server, a router, a network PC, a client, a peer device or other common network node, and typically includes many or all of the elements described above relative to the computer 20, although only a memory storage device 50 has been illustrated in FIG. 1. The logical connections depicted in FIG. 1 include a local-area network (LAN) 51 and a wide-area network (WAN) 52. Such networking environments are commonplace in offices, enterprise-wide computer networks, intranets and the Internet.

When used in a LAN-networking environment, the computer 20 is connected to the local network 51 through a network interface or adapter 53, which is one type of communications device. When used in a WAN-networking environment, the computer 20 typically includes a modem 54, a type of communications device, or any other type of communications device for establishing communications over the wide area network 52, such as the Internet. The modem 54, which may be internal or external, is connected to the system bus 23 via the serial port interface 46. In a networked environment, program modules depicted relative to the personal computer 20, or portions thereof, may be stored in the remote memory storage device. It is appreciated that the network connections shown are exemplary and other means of and communications devices for establishing a communications link between the computers may be used.

The hardware and operating environment in conjunction with which embodiments of the invention may be practiced has been described. The computer in conjunction with which embodiments of the invention may be practiced may be a conventional computer, a distributed computer, or any other type of computer; the invention is not so limited. Such a computer

typically includes one or more processing units as its processor, and a computer-readable medium such as a memory. The computer may also include a communications device such as a network adapter or a modem, so that it is able to communicatively couple to other computers.

5

### System Level Overview

A system level overview of the operation of an exemplary embodiment of an extensible object model is described by reference to FIG. 2. The extensible object model 200 in FIG. 2 represents an application that is executed on a standard computer, such as local computer 20 or remote computer 49 in FIG. 1. The extensible object model 200 is illustrated as a hierarchy with a root object 201 at the top of the hierarchy and two second level hierarchical objects, a "bar" file object 202 and a "foo" window object 203. Particular methods are inherent in each object in the model. For example, the foo window object 203 has inherent methods such as "close," "move," and "resize."

The inherent methods of window object 203 are extended by an "editor" method through an "editor" extension object 204 obtained via an extension provider object 208. The name "editor" for the method is not resolved, nor are the extension provider object 208 or the editor extension object 204 bound into the object model, when the application is compiled or loaded. Instead the name "editor" is resolved to the extension object 204 when an application first invokes "foo.editor," known in the art as "late binding." Before the application is executed, an editor package 207 that proffers the editor extension object 204 is obtained from its vendor, registered in an extension database 205, and stored on persistent storage 209 as editor package 206.

When “foo.editor” is first invoked by the application, the run-time environment executing the application determines that the editor method is not inherent to the foo window object 203 and searches the extension database 205 to locate the editor package 206. The package 206 proffers the extension provider object 208, which is responsible for creating the editor extension object 204 to service all calls to the editor method. A locator value for the editor method is cached to bind the method name “editor” to the editor extension object 204 when the first invocation of foo.editor is made. Binding through a locator value is referred to in the art as “ID binding.” Subsequent references to foo.editor are directed to the editor extension object 204 by the run-time environment.

As will be immediately perceived by one skilled in the art, the extensible object model is not limited to extending an object with only additional methods but is equally capable of extending an object’s properties. Furthermore, both late and ID binding of the extension and extension provider objects into the object model has readily apparent benefits, including the ability to ship an object-based application without providing all extended capabilities in the same package.

While the object model illustrated in FIG. 2 shows the extension object being bound to a single window object 203, the extension object is equally capable of being bound to a collection of window objects to extend each object in the collection. Moreover, a single extension package can proffer more than one type of extension object by parameterizing the extension provider object so that parameters input into the extension provider object determine the type of extension object created.

The system level overview of the operation of an exemplary embodiment of the invention has been described in this section of the detailed description. An extensible object

model enables an object at any level in the model hierarchy to be extended by binding an extension object with additional functionality into the model. The binding is at invocation time of the extension through either ID or late binding. While the invention is not limited to any particular object model hierarchy, for sake of clarity a simplified, extended two-level hierarchical object model has been described.

### Methods of an Exemplary Embodiment of the Invention

In the previous section, a system level overview of the operation of exemplary embodiments of the extensible object model were described. In this section, the particular methods performed by a computer implementing such exemplary embodiments are described by reference to a series of flowcharts. The methods to be performed by the computer constitute computer programs made up of computer-executable instructions. Describing the methods by reference to a flowchart enables one skilled in the art to develop such programs including such instructions to carry out the methods on suitable computers (the processor of the clients executing the instructions from computer-readable media). The methods described in this section can equated directly to methods of the extensible objects themselves or can be computer-executable instructions performed by other objects in the run-time environment.

Referring first to FIG. 3A, a flowchart of a method to be performed by a computer according to an exemplary embodiment of the extensible object model is shown. The extensible object model contains at least one extension provider object capable of proffering at least one extension object to service a method or property that extends a standard object in the model as described in the previous section. Before the application employing the extensible object model is executed, an extension package containing computer-executable

instructions for the extension provided through the extension object is obtained (block 301).

When the package is installed on the computer, the installation process stores the package (block 303) on persistent storage and registers the package by creating a corresponding entry in an extension database (block 305) under the extension name. The package also contains  
5 computer-executable instructions to proffer the extension provider object and the appropriate extension object when the extension(s) is invoked. In one embodiment, the user of the computer obtains and installs the package directly. In an alternate embodiment, the installation process for the application causes the package to be obtained and installed.

FIG. 3B illustrates the actions taken by the run-time environment of the extensible  
10 object model when an application invokes a method or property for an extensible object. The run-time environment determines if the method or property is inherent to the object being referenced (block 311). If it is, the run-time environment continues its normal processing. If the method or property is not inherent to the object being referenced, the runtime environment determines if the extension is registered in the extension database (block 313). If the  
15 extension is not registered, the run-time environment returns an error.

If the extension is registered, the run-time environment uses the corresponding entry in the extension database to determine if the extension object for the extension exists (block 315). If so, the run-time environment processes the invocation of the extension method or property by directing the call to the associated function provided by the extension object  
20 (block 321).

If no extension object exists, the run-time environment uses the extension's entry in the extension database to locate the package that proffers the extension provider object (block 317). The package creates the extension provider object, which then processes parameters

passed in by the run-time environment to create the appropriate extension object (block 319).

The run-time environment then directs the call to the extension object (block 321).

In one embodiment, the entry in the extension database contains a locator (such as a “moniker” or “clsid”) for the extension package that causes the computer-readable instructions and data for the extension provider object and the extension to be read from persistent storage at block 321. In an alternate embodiment, both the extension provider object and the extension object are cached when first invoked so the instructions and data are read from cache at block 321 on subsequent calls.

The particular methods performed by a computer for an exemplary embodiment of the extensible object model have been described. The method performed to register an extension has been shown by reference to a flowchart including all the steps from 301 until 305. The method performed to resolve an extension has been shown by reference to a flowchart including all steps from 311 until 319.

### Application Development Environment Implementation

In this section of the detailed description, particular implementations of the extensible object model are described which are applicable in a general object-based application development environments such as Microsoft’s Visual Studio development environment. Because the extensible object model provides extensions that are accessible through late or ID binding and thus the extension objects do not have to be present when an application is developed, independent software vendors (ISVs) can readily extend an application from another vendor by proffering additional methods and/or properties for the objects comprising the application.

As illustrated in FIG. 4, an exemplary embodiment for an application based on an extensible object model 400 contains a DTE (Design Time Environment) object 401 at the root level of the hierarchy. An events object 402 acts as a centralized monitoring and sourcing object for events generated by the objects in the model 400 as described in co-  
5 pending U.S. Patent Application Serial No. 09/017988, titled "EVENT SOURCING AND FILTERING FOR TRANSIENT OBJECTS IN A HIERARCHIAL OBJECT MODEL," filed on February 3, 1998 and assigned to the assignee of the present application. Additional objects for the application employing the extensible object model 400 are collectively represented by object 403. It should be noted that the object model can contain object  
10 collections as well as individual objects and that extensions can be applied to both.

Two extension objects obtained through the methods described in the previous section are illustrated in FIG. 4. One is a "VBProjects" extension object 404 that adds Basic language capabilities to the development environment by extending the methods and properties of the DTE object 401. All objects, such as object 403, residing below the DTE object 401 can also  
15 be extended. The other extension object is a "VBProjectsevents" extension object 405 that extends the events object 402 to handle and re-expose events generated by the VBProjects object 404. While FIG. 4 shows the extension object 404 extending the DTE object 401, this is for the sake of simplicity in illustration and the invention is not limited to extending only root objects.

20 The VBProjects extension object 404 is referred to as dte.VBProjects. An application that employs the extensible object model shown in FIG. 4 can invoke methods (such as NewProject, OpenProjectFromFile) and properties (such as CountOfProjects) exposed by the VBProjects extension object 404 via late or ID binding. When such an invocation occurs, the

run-time environment searches for the invocation name in the fixed (non-extensible) region of the name space that contains the inherent methods and properties for the object model. If the name cannot be resolved, then the extension database is queried to locate the extension package 406. As described above, the package 406 is loaded from persistent storage 407 and proffers an ExtensibleObjectProvider object 409 as the extension provider object. Using an identifier for the object being extended and the extension name for the method or property, the appropriate VBProjects extension object 404 is created by the ExtensibleObjectProvider object 409. If this is the first invocation of the method or property in the package, the ExtensibleObjectProvider object 409 and the VBProjects extension object 404 are cached in memory 408. Subsequent invocations to the same method or property on the same extended object with the same arguments (as appropriate) are delegated directly to the cached VBProjects extension object 404; subsequent invocations to different extended objects, or to different methods or properties provided by the extension package 406, are directed to the cached ExtensibleObjectProvider object 409.

Similarly, an application that employs the extensible object model shown in FIG. 4 can synchronize events by obtaining a specialized event filtering and sourcing object (VBProjectsevents) 405 through a centralized “events” monitoring and sourcing object 402 by providing the appropriate filtering arguments. When an application first invokes `dte.events.VBProjectevents(args)`, the extension database is queried and the extension package 406 located and loaded. The extension package 406 proffers the ExtensibleObjectProvider object 409. The VBProjectsevents extension object 405 is obtained by passing the filtering arguments into the ExtensibleObjectProvider object 409, which then proffers the VBProjectsevents extension object 405.



In one embodiment, an extension database is maintained for each application employing the extensible object model. Each record in the database is associated with a registered package and contains data pertaining to a particular extension. FIG. 5 illustrates an exemplary embodiment for a database record 501 comprising an extension identifier 502, an object identifier 503 for the object to be extended, an extension name 504, a friendly name 505 for the extension, a description field 506, an internal name 507, and an identifier 508 for the extension package. The friendly name 505 and the description field 506 are displayed by a development environment browser when the user browses through the components of the development object model. The package typically exposes the extension name 504 as its external property name. The extension name 504 for a particular package is mapped to the internal name 507 that is actually used when calling into the package. Because the mapping decouples the extension and internal names, there can be duplicate extension names in the object model, with the restriction that extension with identical extension names cannot be used to extend the same object. Furthermore, decoupling the extension and internal names allows a different versions of a package to proffer different versions of the same extension object without having the change the extension name that is bound into the object model.

Additional details for the fields of the database record 501 are given in Table 1.

Field	Data Type	Comments
ExtensionID	identity	Unique identifier for each extension
ObjectID	varchar(256)	Identifier for the extensible object. Typically Name of Object, i.e. 'DTE'
ExtensionName	ntext	Extension Name for the extension. i.e. 'VBProjects'
FriendlyName	ntext	Friendly Name for the extension, i.e. 'VBProject

		collection object'
Description	ntext	Description of the extension, i.e. 'enumerates the collection of the VBProjects in the workspace'
InternalName	Ntext	Name to be used when calling the package for the extension
ProgID	ntext	Identifier of the extension package, i.e. {pkg clsid}

**Table1**

In an alternate embodiment running under one of the Microsoft Windows family of operating system, entries in the Windows registry comprise the extension database. Each package entry appears as follows:

```

/software
  /microsoft
    /visual studio
      /packages
        /{pkg clsid} = "Some extension Provider"
          /automation
            /ObjectID
              /"foo" = "Description String"
                /InternalName
                /FriendlyName

```

In both embodiments, the run-time environment registers the relevant method and/or property information in the appropriate application database or under the appropriate registry key when the extension package is installed. Furthermore in both embodiments, a package can provide more than one extension by proffering different extension objects, with each extension having a separate entry in the appropriate database.

In the exemplary implementation, the extensible object model provides an internal extension interface so that an object derived from the interface inherits the ability to maintain

parent-child relationships between itself and its extension object(s) in an extensible environment.

```
5      [
        uuid(<<GUID>>),
        version(1.0), odl, hidden, restricted
      ]
      interface IExtensibleObjectSite : IUnknown
      {
10     HRESULT NotifyDelete( [in] IUnknown *punkObj);
        HRESULT GetSiteID ([out] Variant *varObjID);
      }
```

Extension provider objects, such as ExtensibleObjectProvider object 409, implement the following interface:

```
15      [
        uuid(<<GUID>>),
        version(1.0), odl, hidden, restricted
      ]
20     interface IExtensibleObjectProvider : IUnknown
      {
        HRESULT GetAutomationObject([in] BSTR Name, [in] IExtensibleObjectSite
        *pParent, [in] VARIANTARG_RPC_FAR *rgvarg, [in] UINT cArgs; [out] IDispatch
        **ppDisp);
25     }
```

In order to establish the appropriate parent-child relationship between the object to be extended (the parent) and the extension object (the child) at run-time, when the extension is first invoked, the run-time environment locates the package and issues a standard

30 QueryInterface call to obtain the IExtensibleObjectProvider interface. The parent object is queried for its IExtensibleObjectSite interface using QueryInterface. The required extension object (AutomationObject) is obtained via a call to “IExtensibleObjectProvider::GetAutomationObject(),” passing in the corresponding extension

name and the parent's IExtensibleObjectSite interface, along with additional arguments as appropriate. If the extension name does not uniquely identify the extension object to be proffered, the extension provider object calls the "IExtensibleObjectSite::GetSiteID" method to get the identity of the parent object (ObjectID). The combination of the parent identifier and the extension name uniquely identifies the corresponding extension object. Once the appropriate extension object is identified, its interface pointer (IDispatch) is returned. Because a parent object must exist as long as the extension (child) object exists, the extension object notifies parent object via "IExtensibleObjectSite::NotifyDelete" when the extension object is to be deleted so that the parent object can perform its required clean-up duties.

In an alternate embodiment, extensible objects support a special method, "GetObject(ExtensionName, . . .)," which has its name present in the fixed name space for the object. Hence, applications can bind to this method at compile time ("early binding"). When the GetObject method is invoked, it performs all the extensible object binding mechanics, as previously described, to obtain the extension object. Therefore, the extensible object model in this embodiment can be employed by application development languages that do not readily support late binding. For example, dte.events.GetObject("VBProjectsevents") returns an object that is obtainable through dte.Events.VBProjectsevents in FIG. 4.

In the Visual Studio exemplary implementation, the extension database is stored in the Windows registry and each entry is as follows:

```

/software
  /microsoft
    /visual studio
      /packages
        /{pkg clsid} = "Some extension Provider"
```

```

/automation
/"foo" = "Description String"
/FriendlyName

```

Neither the ObjectID nor the InternalName are present in this implementation. Each

5 extension package is cached after one of its extensions is first invoked.

In one embodiment of the extensible object model in Visual Studio, an extension package must support an ISvPackage interface.

```

10 interface uuid(<<GUID>>)
    IVsPackage : public IUnknown
    {
    public:
    ...
    virtual HRESULT STDMETHODCALLTYPE GetAutomationObject(
15         * [in] /*/ LPCOLESTR pszPropName,
         * [out] /*/ IDispatch __RPC_FAR * __RPC_FAR *ppDisp) = 0);
    ..
    };

```

In a simplified manner, the “IVsPackage::GetAutomationObject” method supplies the functionality provided by the IExtensibleObjectProvider::GetAutomationObject described previously.

When an extension that does not require arguments is invoked, the run-time environment uses the IVsPackage::GetAutomationObject method to obtain the extension object for the given name from the package. If an extension requires arguments, an intermediate automation object is obtained through the IVsPackage::GetAutomationObject

25 method using a pre-defined name for the intermediate automation object. Using this intermediate automation object, an identifier (DispID) is obtained for the extension object via a call to IDispatch::GetIDsOfNames for the given extension. Then IDispatch::Invoke is called, passing in the arguments for the extension.

In this section, particular implementations of the extensible object model for object-oriented application development environments have been described, including exemplary embodiments of the extension database and interfaces created in the extensible objects to resolve the name of an extension to the corresponding extension object that implements the instructions for the extension.

### Conclusion

An extensible object model has been described that enables the binding of extended functions to objects in the model at application run time. Although specific embodiments have been illustrated and described herein, it will be appreciated by those of ordinary skill in the art that any arrangement which is calculated to achieve the same purpose may be substituted for the specific embodiments shown. This application is intended to cover any adaptations or variations of the present invention.

For example, those of ordinary skill within the art will appreciate that although user applications have been used to illustrate the invention, the extensible object model is appropriate to other applications. Consider an operating system in which hardware components are represented as objects, so that, for example, a tape drive object can be extended with different compression objects that implement various tape compression algorithms.

Furthermore, those of ordinary skill within the art will appreciate that the terminology used in this application with respect to the Microsoft Visual Studio development and run-time environments is meant to include all object-oriented environments which incorporate an



We claim:

1. A computerized method for providing extended functionality to an extensible object in an object model comprising:

locating a package for the extended functionality;

obtaining an extension object for the extended functionality from the package; and

directing references to the extended functionality to the extension object.

2. The method of claim 1, wherein locating the package comprises:

searching for an entry for the extension in an extension database.

3. The method of claim 1, wherein obtaining the extension object comprises:

creating the extension object when the extended functionality is first referenced; and

locating the extension object when the extended functionality is subsequently referenced.

4. The method of claim 3, further comprising storing the extension object in a cache memory so that the extension object is located in cache memory upon subsequent references to the extended functionality.

5. The method of claim 3, wherein creating the extension object further comprising:

obtaining an extension provider object; and

specifying parameters to the extension provider object to create the extension object.



6. The method of claim 5, wherein obtaining an extension object comprises:  
creating the extension provider object if it does not exist; and  
locating the extension provider object if it does exist.
7. The method of claim 6, further comprising storing the extension provider object in a cache memory so that the extension provider is located in cache memory when it exists.
8. The method of claim 1, further comprising:  
storing the package on a persistent storage; and  
creating an entry in an extension database for the package to register the package.
9. The method of claim 5, further comprising:  
obtaining the package from an external source.
10. The method of claim 1, wherein the elements are performed in the order recited.
11. A computer-readable medium having stored thereon an entry for an extension in extension data structure comprising:  
an extension identifier field containing data representing an identifier for the extension;  
an extension name field containing data representing an external name for the extension identified by the extension identifier field ; and

a extension object identifier field containing data representing an extension package for the extension identified by the extension identifier field.

12. The computer-readable medium of claim 11, further comprising:

an object identifier field containing data representing an extensible object having functionality extended by the extension identified by the extension identifier field.

13. The computer-readable medium of claim 11, further comprising:

an internal name field containing data representing an internal name for the extension identified by the extension identifier field.

14. The computer-readable medium of claim 11, further comprising:

a friendly name field containing data representing a browsable name for the extension identified by the extension identifier field.

15. The computer-readable medium of claim 11, further comprising:

a description field containing data representing a textual description of the extension identified by the extension identifier field.

16. A computerized system comprising:

a processing unit;

a system memory coupled to the processing unit through a system bus;

a computer-readable medium coupled to the processing unit through a system bus;

an extensible object model executed from the computer-readable medium by the processing unit, wherein the extensible object model causes the processing unit to create an extension object from an extension package when a corresponding extension for an extensible object is first referenced and to delegate subsequence references to the extension to the extension object.

17. The computerized system of claim 16, wherein the extensible object model further causes the processing unit to notify the extensible object when the extension object is deleted.

18. The computerized system of claim 16, wherein the extensible object model further causes the processing unit to register the extension package in an extension database stored on the computer-readable medium.

19. The computerized system of claim 16, wherein the extensible object model further causes the processing unit to store the extension object in system memory when the corresponding extension is first referenced.

20. The computerized system of claim 16, wherein the extensible object model causes the processing unit to create the extension object from the extension package by causing the processing unit to create an extension provider object and causes the processing unit to create the extension object from the extension provider object.

21. The computerized system of claim 16, wherein the extensible object model further causes the processing unit to create an event filtering and sourcing object to handle events generated by the extension object.

22. A method of providing an extension to an extensible object in a run time environment comprising:

issuing, by the runtime environment, a GetAutomationObject call to an extension package;

proffering, by the extension package, an extension object that provides the extension as a result of the GetAutomationObject call;

associating, by the runtime environment, the extension object and the extensible object in an extension database; and

resolving, by the runtime environment, an invocation of the extension for the extensible object to the extension object through the extension database.

23. The method of claim 22, further comprising:

issuing, by the extension object, a NotifyDelete call to the extensible object when the extension object is being deleted.

24. A method of providing an extension to an extensible object in a run time environment comprising:

proffering, by an extension package, an extension provider object associated with the extension;

issuing, by the run time environment, a QueryInterface call to the extension provider object;

returning, by the extension provider object, an IExtensibleObjectProvider interface as a result of the QueryInterface call;

issuing, by the run time environment, a GetAutomationObject call to the IExtensibleObjectProvider interface;

proffering, by the extension provider object, an extension object, which services invocation of the extension, as a result of the GetAutomationObject call;

associating, by the runtime environment, the extensible object and the extension object in parent-child relationship; and

resolving, by the runtime environment, an invocation of the extension for the extensible object to the extension object.

25. The method of claim 24, further comprising:

calling, by the extension provider object, an IExtensibleObjectSite interface in the extensible object to obtain an identifier for the extensible object.

26. A method of providing an extension to an extensible object in a run time environment comprising:

storing, by a development environment, a GetObject method name in a fixed name space for the extensible object;

invoking, by the development environment, the extension for the extensible object using the GetObject method; and

binding, by the run time environment, an extension object for the extension to the extensible object by executing the GetObject method.

27. A computer-readable medium having stored thereon computer-executable components comprising:

an extensible object;

an extension database having an entry for an extension for the extensible object; and

an extension package having an interface for obtaining an extension object that

provides the extension for the extensible object.

28. The computer-readable medium of claim 27, further comprising:

an extension provider object that proffers the extension object as a result of a call to the interface in the extension package.

## ABSTRACT OF THE DISCLOSURE

An extensible object model enables extending the standard methods and/or properties of an extensible object for an application through an extension object proffered at run time by an extension package. Information about the extension package is registered in a database  
5 when the package is installed, and the database is used to resolve references to the extended methods and/or properties upon execution of the application. In one aspect of the invention, the extension object is cached when first referenced and subsequent references to the extension while the application is executing are resolved to the cache.

**"Express Mail" mailing label number:** ELO42945823US  
**Date of Deposit:** JANUARY 29 1999  
I hereby certify that this paper or fee is being deposited with the  
United States Postal Service "Express Mail Post Office to Addressing"  
service under 37 CFR 1.10 on the date indicated above and is  
addressed to the Assistant Commissioner for Patents,  
Washington, D.C. 20231  
**Printed Name:** Sheryl S. Dillaway  
**Signature:** [Signature]

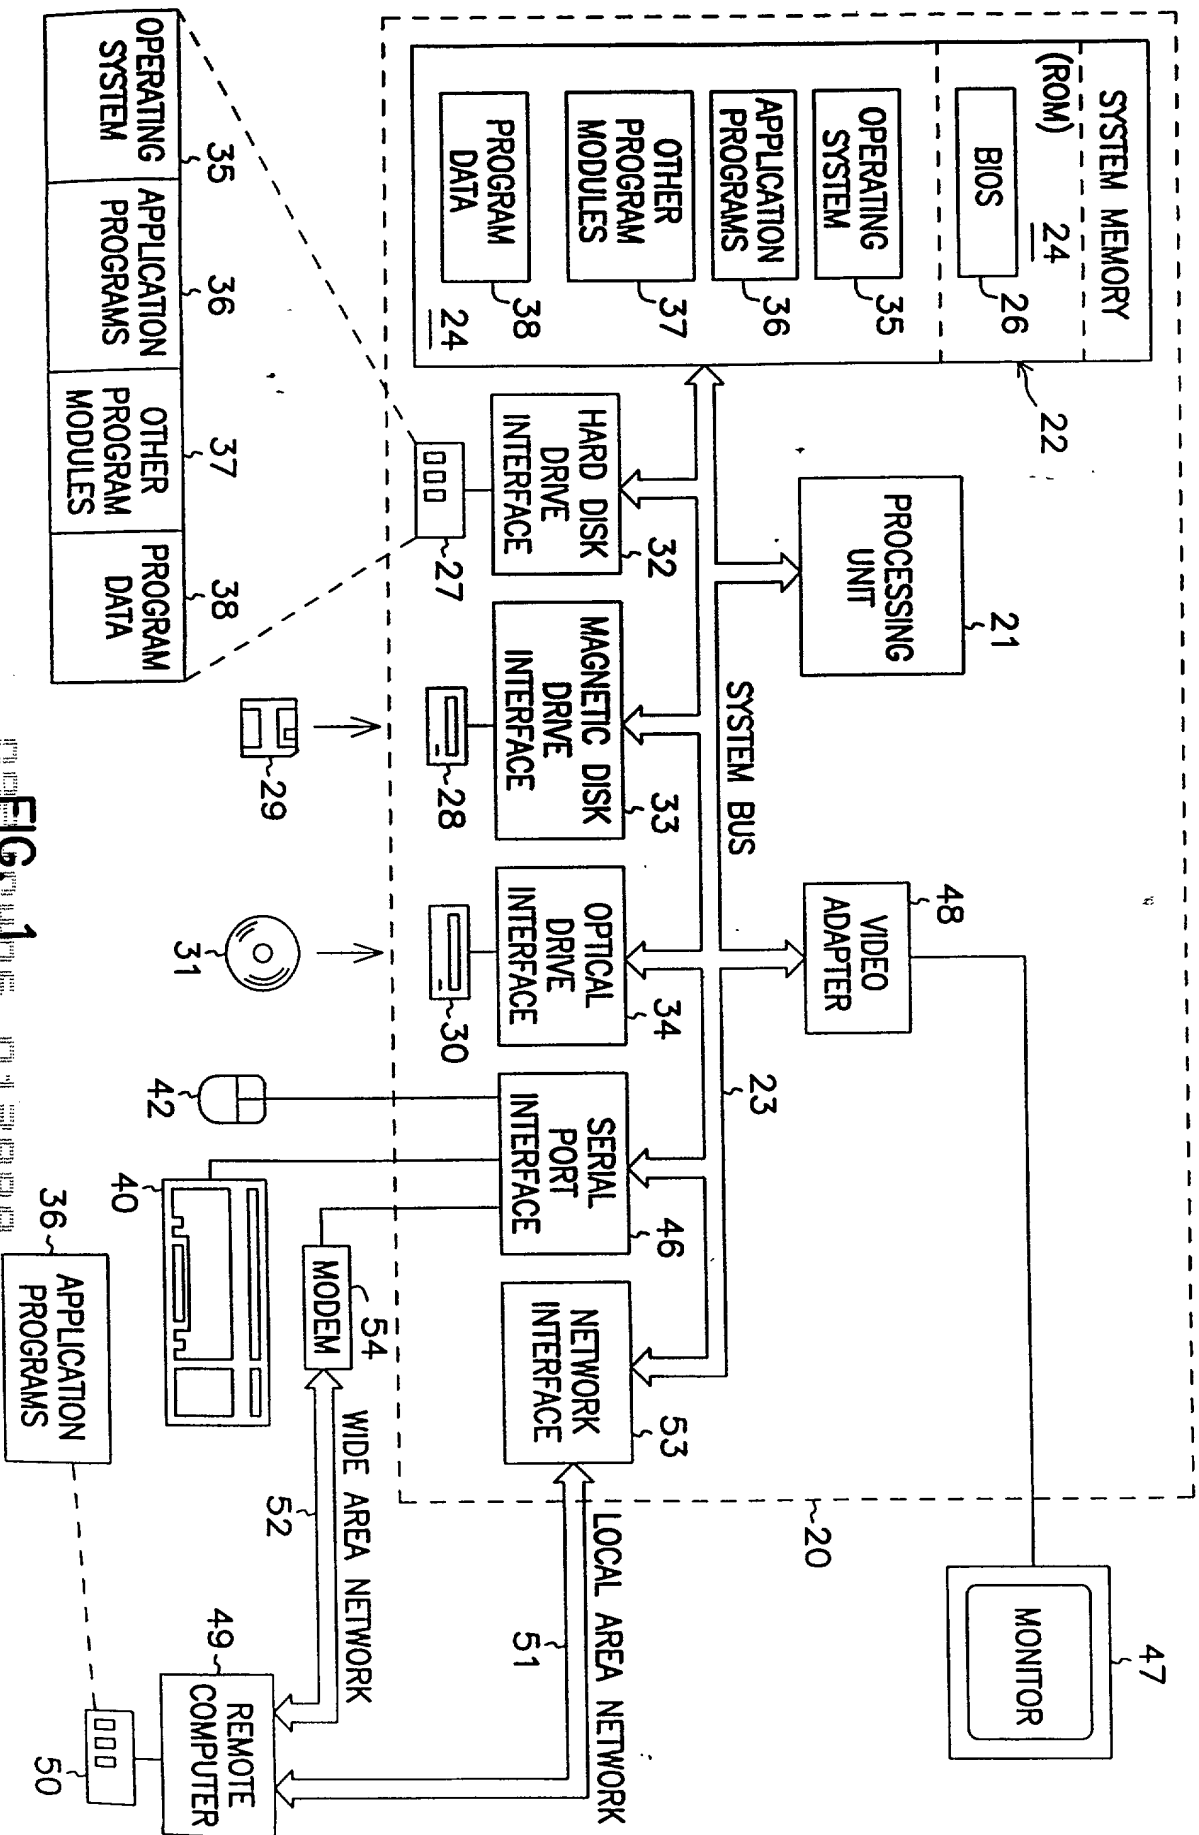


FIG. 1 is a block diagram of a computer system.



200

USER

VENDOR

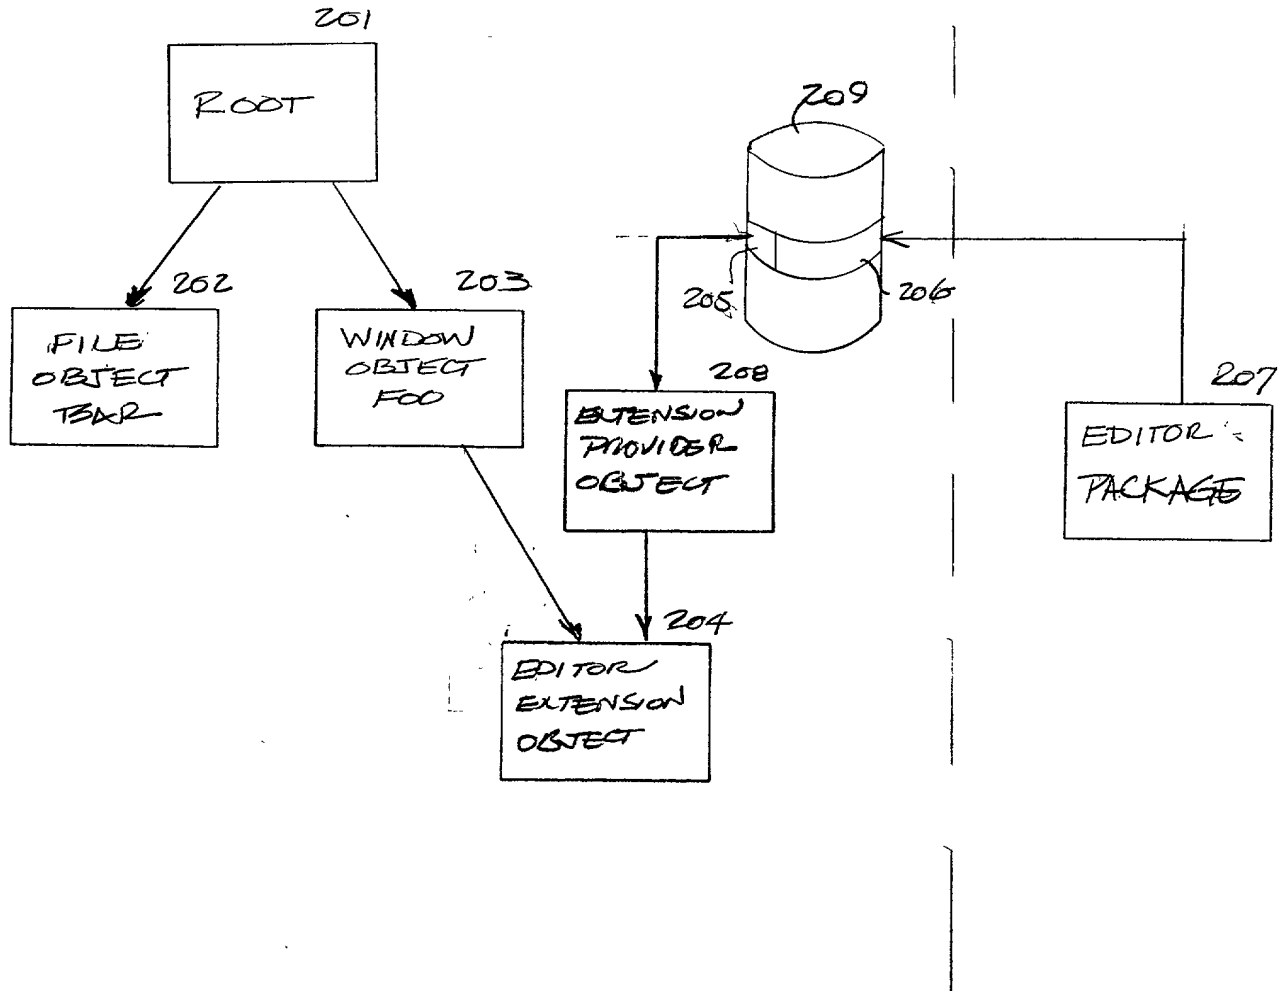


FIG. 2

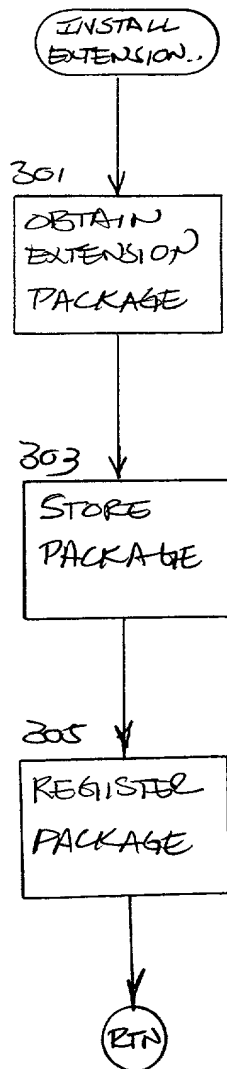


FIG. 3A

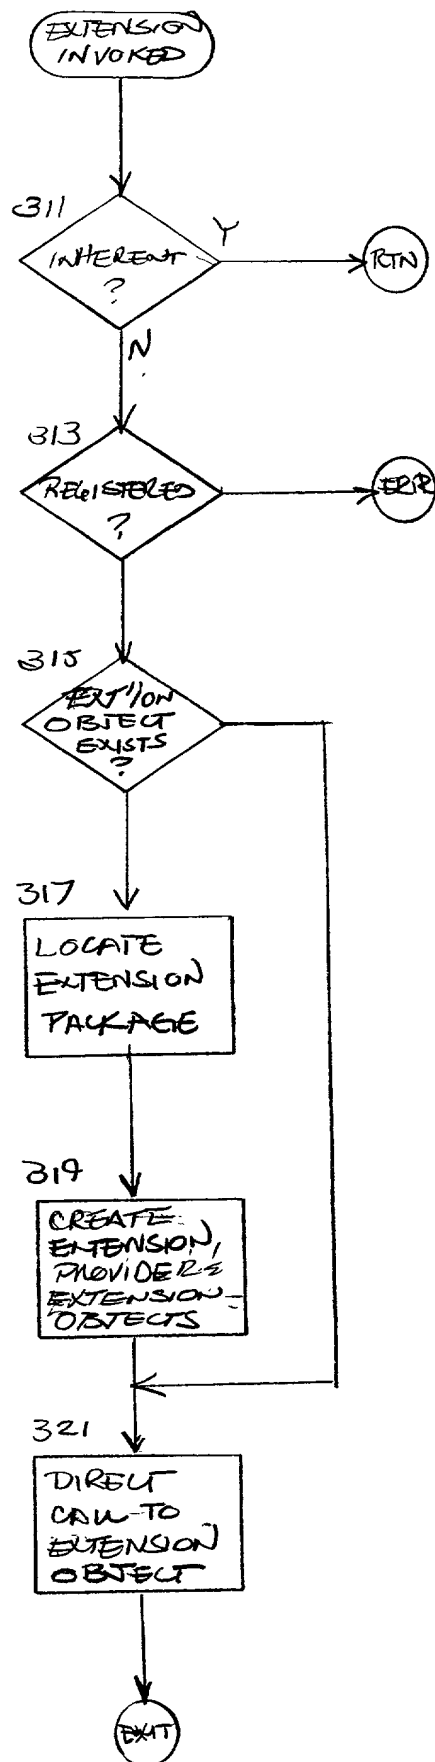
[illegible]

FIG. 4

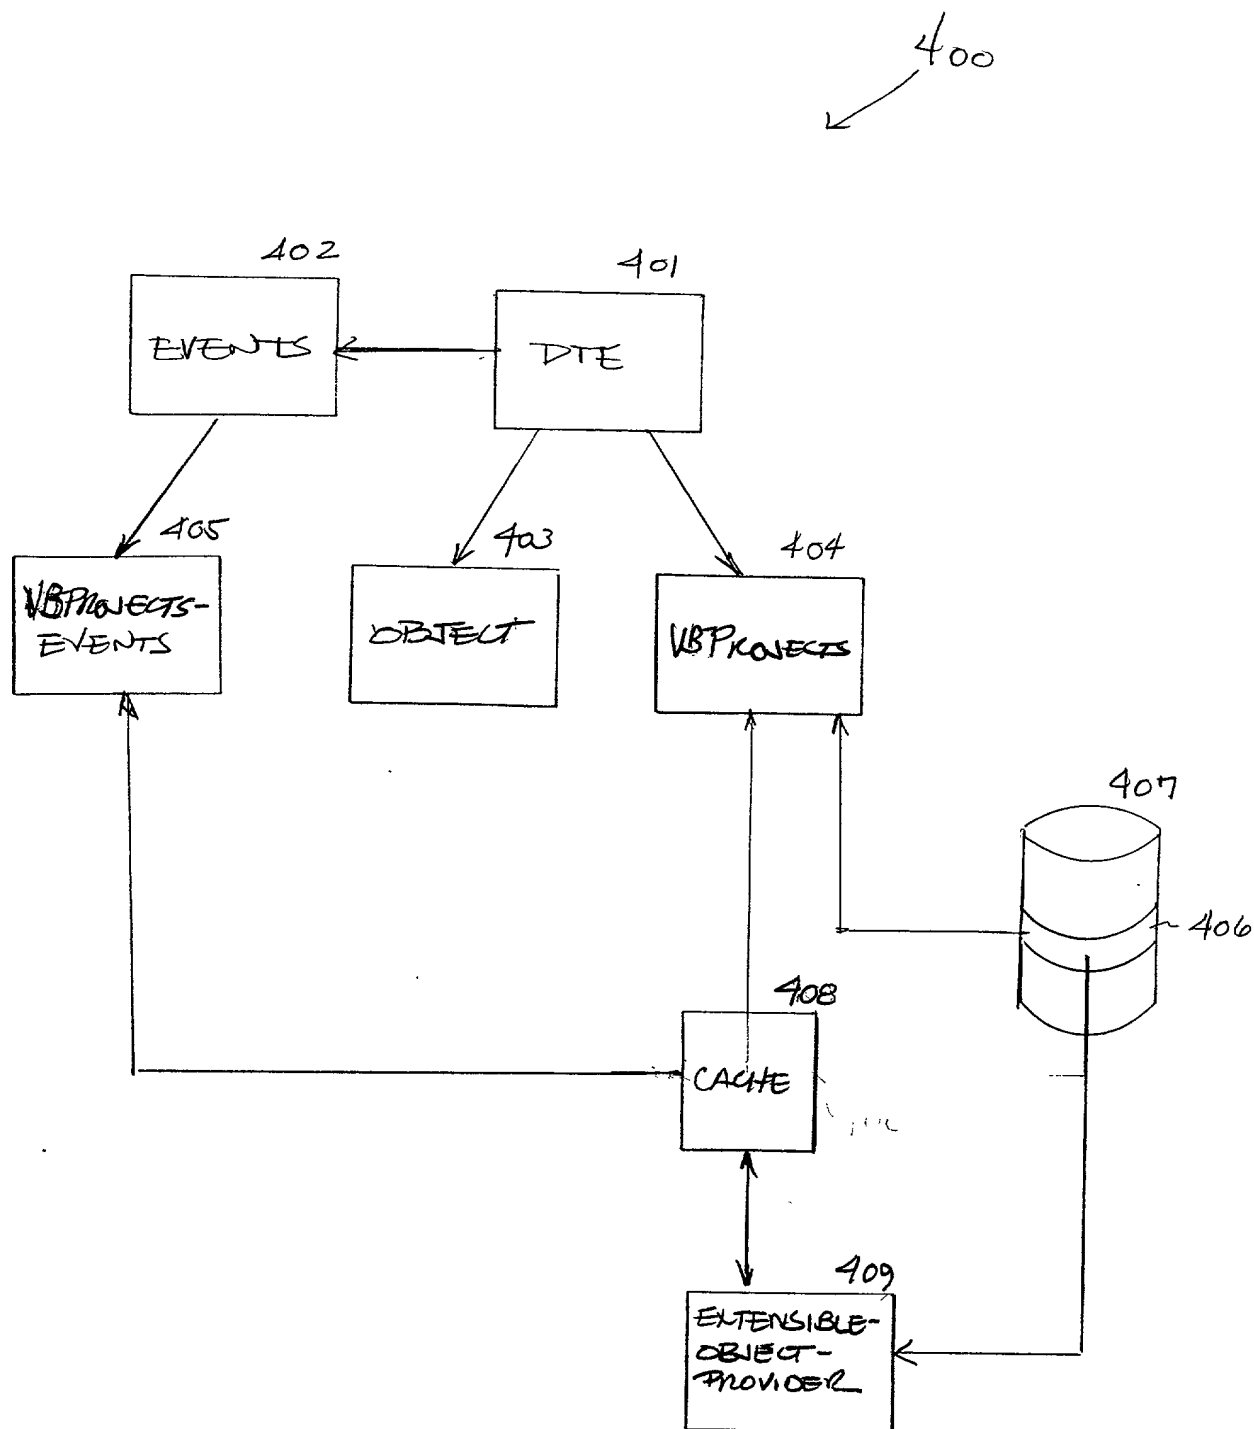


FIG. 4

501  
↓

502	EXTENSION IDENTIFIER
503	OBJECT IDENTIFIER
504	EXTENSION NAME
505	FRIENDLY NAME
506	DESCRIPTION
507	INTERNAL NAME
508	EXTENSION PACKAGE ID

FIG. 5

# United States Patent Application

## COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that

I verily believe I am the original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled: EXTENSIBLE OBJECT MODEL.

The specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, § 1.56 (see page 3 attached hereto).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119/365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on the basis of which priority is claimed:

**No such claim for priority is being made at this time.**

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below.

**No such claim for priority is being made at this time.**

I hereby claim the benefit under Title 35, United States Code, § 120/365 of any United States and PCT international application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

**No such claim for priority is being made at this time.**

I hereby appoint the following attorney(s) and/or patent agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith:

Adams, Matthew W.	Reg. No. P-43,459	Fogg, David N.	Reg. No. 35,138	Lundberg, Steven W.	Reg. No. 30,568
Anglin, J. Michael	Reg. No. 24,916	Forndenbacher, Paul J.	Reg. No. 42,546	Mates, Robert E.	Reg. No. 35,271
Arora, Suneel	Reg. No. 42,267	Forrest, Bradley A.	Reg. No. 30,837	McCrackin, Ann M.	Reg. No. 42,858
Bianchi, Timothy E.	Reg. No. 39,610	Harris, Robert J.	Reg. No. 37,346	Padys, Danny J.	Reg. No. 35,635
Billion, Richard E.	Reg. No. 32,836	Holloway, Sheryl S.	Reg. No. 37,850	Polglaze, Daniel J.	Reg. No. 39,801
Black, David W.	Reg. No. 42,331	Huebsch, Joseph C.	Reg. No. 42,673	Sako, Katie E.	Reg. No. 32,628
Bremman, Thomas F.	Reg. No. 35,075	Kalis, Janal M.	Reg. No. 37,650	Schwegman, Micheal L.	Reg. No. 25,816
Brooks, Edward J., III	Reg. No. 40,925	Klima-Silberg, Catherine I.	Reg. No. 40,052	Sieffert, Kent J.	Reg. No. 41,312
Clark, Barbara J.	Reg. No. 38,107	Kluth, Daniel J.	Reg. No. 32,146	Slifer, Russell D.	Reg. No. 39,838
Crouse, Daniel D.	Reg. No. 32,022	Lacy, Rodney L.	Reg. No. 41,136	Steffey, Charles E.	Reg. No. 25,179
Drake, Eduardo E.	Reg. No. 40,594	Leffert, Thomas W.	Reg. No. 40,697	Terry, Kathleen R.	Reg. No. 31,884
Dryja, Michael A.	Reg. No. 39,662	Lemaire, Charles A.	Reg. No. 36,198	Viksins, Ann S.	Reg. No. 37,748
Embretson, Janet E.	Reg. No. 39,665	Litman, Mark A.	Reg. No. 26,390	Woessner, Warren D.	Reg. No. 30,440

I hereby authorize them to act and rely on instructions from and communicate directly with the person/assignee/attorney/firm/organization/who/which first sends/sent this case to them and by whom/which I hereby declare that I have consented after full disclosure to be represented unless/until I instruct Schwegman, Lundberg, Woessner & Kluth, P.A. to the contrary.

Please direct all correspondence in this case to Schwegman, Lundberg, Woessner & Kluth, P.A. at the address indicated below:

P.O. Box 2938, Minneapolis, MN 55402  
Telephone No. (612)373-6900

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of joint inventor number 1 : **Joseph P. Fernando**

Citizenship: **United States of America**

Residence: **Woodinville, WA**

Post Office Address: **15309 179th Avenue N.E.  
Woodinville, WA 98072**

Signature: \_\_\_\_\_ Date: \_\_\_\_\_  
Joseph P. Fernando

Full Name of joint inventor number 2 : **Chris Farley**

Citizenship: **United States of America**

Residence: **Woodinville, WA**

Post Office Address: **14638 Bear Creek Lane NE  
Woodinville, WA 98072**

Signature: \_\_\_\_\_ Date: \_\_\_\_\_  
Chris Farley

Full Name of inventor:

Citizenship:

Residence:

Post Office Address:

Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Full Name of inventor:

Citizenship:

Residence:

Post Office Address:

Signature: \_\_\_\_\_ Date: \_\_\_\_\_

§ 1.56 Duty to disclose information material to patentability.

(a) A patent by its very nature is affected with a public interest. The public interest is best served, and the most effective patent examination occurs when, at the time an application is being examined, the Office is aware of and evaluates the teachings of all information material to patentability. Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith in dealing with the Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section. The duty to disclose information exists with respect to each pending claim until the claim is canceled or withdrawn from consideration, or the application becomes abandoned. Information material to the patentability of a claim that is canceled or withdrawn from consideration need not be submitted if the information is not material to the patentability of any claim remaining under consideration in the application. There is no duty to submit information which is not material to the patentability of any existing claim. The duty to disclose all information known to be material to patentability is deemed to be satisfied if all information known to be material to patentability of any claim issued in a patent was cited by the Office or submitted to the Office in the manner prescribed by §§ 1.97(b)-(d) and 1.98. However, no patent will be granted on an application in connection with which fraud on the Office was practiced or attempted or the duty of disclosure was violated through bad faith or intentional misconduct. The Office encourages applicants to carefully examine:

- (1) prior art cited in search reports of a foreign patent office in a counterpart application; and
- (2) the closest information over which individuals associated with the filing or prosecution of a patent application believe any pending claim patentably defines, to make sure that any material information contained therein is disclosed to the Office.

(b) Under this section, information is material to patentability when it is not cumulative to information already of record or being made of record in the application, and

- (1) It establishes, by itself or in combination with other information, a prima facie case of unpatentability of a claim; or
- (2) It refutes, or is inconsistent with, a position the applicant takes in:
  - (i) Opposing an argument of unpatentability relied on by the Office, or
  - (ii) Asserting an argument of patentability.

A prima facie case of unpatentability is established when the information compels a conclusion that a claim is unpatentable under the preponderance of evidence, burden-of-proof standard, giving each term in the claim its broadest reasonable construction consistent with the specification, and before any consideration is given to evidence which may be submitted in an attempt to establish a contrary conclusion of patentability.

(c) Individuals associated with the filing or prosecution of a patent application within the meaning of this section are:

- (1) Each inventor named in the application;
- (2) Each attorney or agent who prepares or prosecutes the application; and
- (3) Every other person who is substantively involved in the preparation or prosecution of the application and who is associated with the inventor, with the assignee or with anyone to whom there is an obligation to assign the application.

(d) Individuals other than the attorney, agent or inventor may comply with this section by disclosing information to the attorney, agent, or inventor.